
# **FORTRES**




#### Operating Instructions: 1 N/O & 1 N/C Non Illuminating

### & Illuminating Switches



•
1 Normally Open (N/O) & 1
Normally Closed (N/C) Switch for
machine control.














**TXZ** 

• Each switch uses 2 output pins.

Range of options:

**Description** 



















Engraving for each button is 2 lines of 8 characters.



Technical Specifications			
Housing Materials	Painted die cast aluminium		
Colour	Dark Grey		
Ingress Protection	IP65*		
Mechanical Life	1,000,000 Operations		
Electrical Life	1,000,000 Operations		
Maximum Frequency of Ops	1 per second		
Ambient Temperature	-25°C to 40°C (-13°F to 104°F)		
Environment	Indoor use only		
Switching Contact Element	2 output		
Switching Current	1mA MIN / 100mA MAX		
Switching Voltage	24V		
*IP protection is to the tGard stack that this module a	attaches to, when correctly fitted according to installation and maintenance instructions.		

Safety Data	
Standards	EN60957-5-5 (Low-voltage switchgear and control gear).
Approvals	TÜV SÜD for Europe, Canada & USA.


Part Number Options			
Description	Part No.		
Pushbutton - Black	TXB		
Pushbutton - Red	TXR		
Pushbutton - Green	TXG		
Pushbutton - White	TXW		
Pushbutton - Yellow	TXY		
Pushbutton - Blue	TXZ		
Illuminating Pushbutton - Red	TX1		
Illuminating Pushbutton - Yellow	TX2		
Illuminating Pushbutton - Green	TX3		
Illuminating Pushbutton - Blue	TX6		
Illuminating Pushbutton - White	TX7		


## Operating Instructions: 1 N/O & 1 N/C Non Illuminating & Illuminating

#### **Switches**

tGard Pushbutton Electrical Guidance			
Inputs	Outputs	Module operates on the safety circuits	Order of pin assignment from base to head
0	2	No	-


tGard Illuminating Pushbutton Electrical Guidance			
Inputs	Outputs	Module operates on the safety circuits	Order of pin assignment from base to head
1	2	No	-

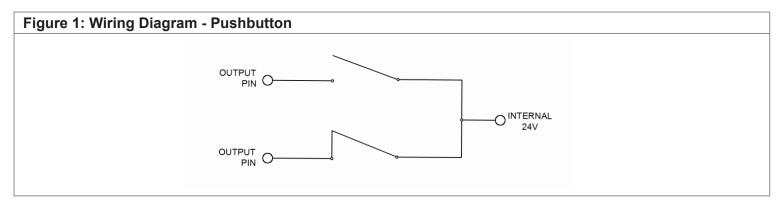

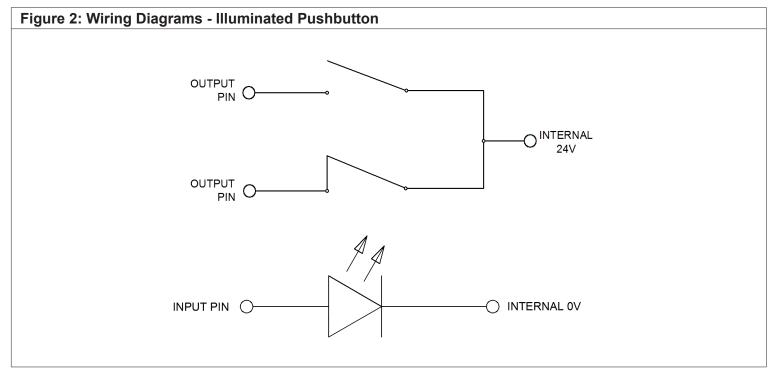

## Operating Instructions: 1 N/O & 1 N/C Non Illuminating & Illuminating

#### **Switches**

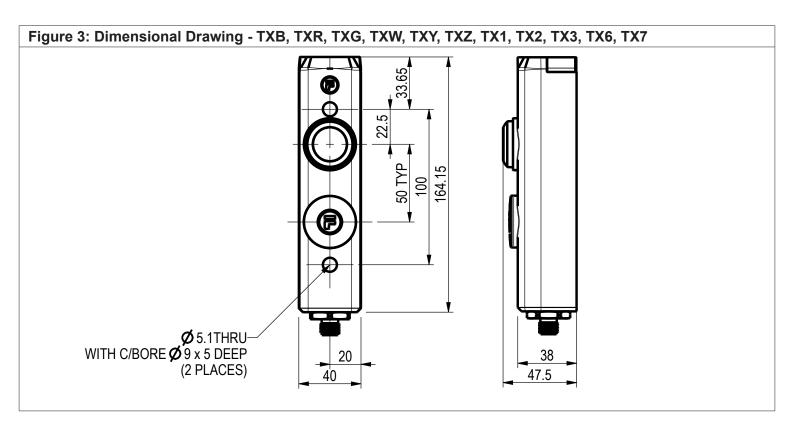

A **Halma** company